



incl. The Powerbox Group

Innovative Power Solutions since 1969

DC-DC Converters

1.5W – 700W

No MOQ


0.003 % Failure Rate

Local Distribution

5-10 year warranty

Technical Design-in Support

Global Sales Support

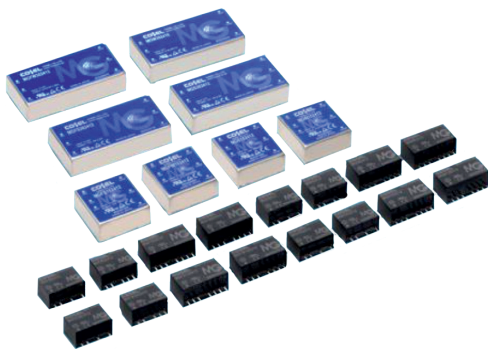


Easy Product Selector!


Available for smart phone, tablet & desktop PC
(Can be used in offline mode when no WiFi is available)



High Power Density DC-DC Converters

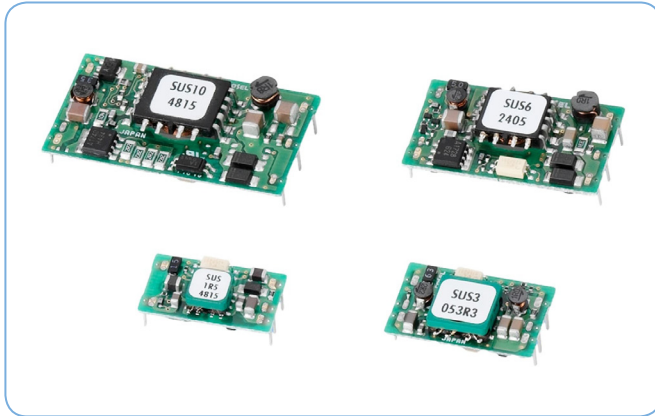

SUS Series

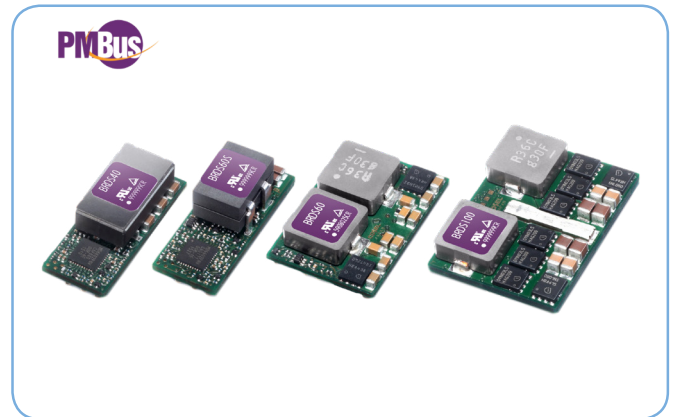

BRDS Series



CHS Series



CBS Series

DC-DC Converter Line up:

- 1.5W to 700W output power
- Up to 7kW output power in parallel
- Low Voltage Input starting from DC4.5V
- 2:1, 4:1 & 10:1 input range
- High Voltage Input DC45V–400V
- Single & Dual Output
- Convection or Conduction cooling
- Isolated or Non-Isolated
- SMD, TH/DIP & DIN Rail mounting options
- Various options including Remote On/Off
- Industry Standard Footprints
- Ultra-compact sizes
- Up to 94 % efficiency
- Point of Load
- Optional PMBus
- Enclosed or Open Frame
- Optional parts Eg. Heat Sink
- Suitable for Railway applications
- Expected life up to 30 years
- 5–10 year warranty