




**External view**


**TAC-50-□□□ / TAC-60-□□□**  
**TAH-50-□□□ / TAH-60-□□□**

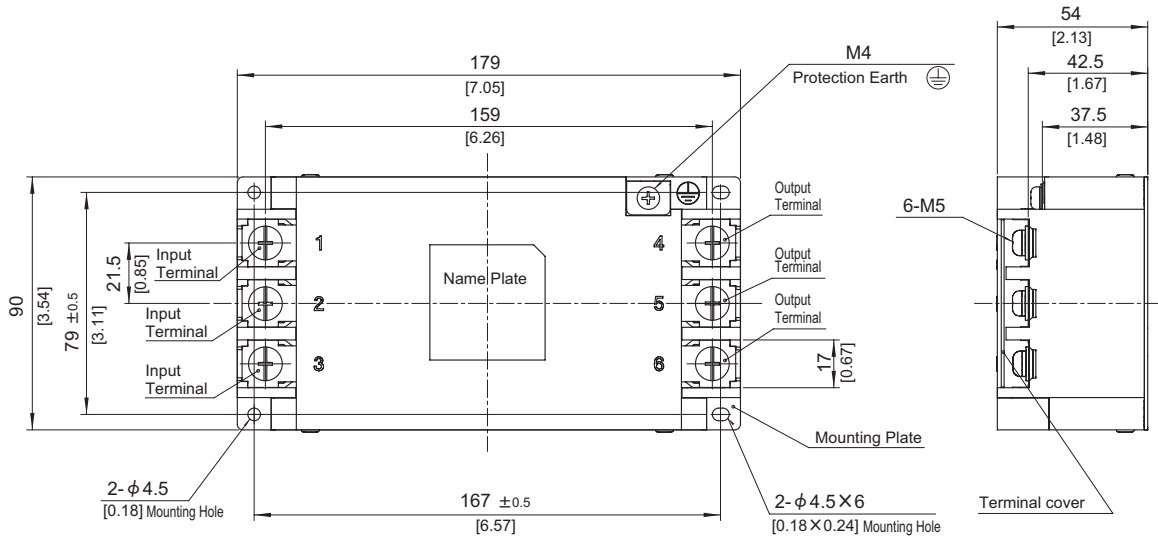

※ Can not be mounted upside-down.  
(mounted the top surface)

※ Tolerance : ±1 [±0.04]  
 ※ Weight : 1.4kg max  
 ※ Mounting Plate : Iron (surface finishing:nickel plating) t=1.2 [0.05]  
 ※ Case : PBT  
 ※ Dimensions in mm, [ ]=inches  
 ※ Terminal block screw tightening torque M5:3.0N · m (30.7kgf · cm) max  
 ※ Protection Earth screw tightening torque M4:1.6N · m (16.9kgf · cm) max

**TAC-80-□□□ / TAC-100-□□□**  
**TAH-80-□□□ / TAH-100-□□□**

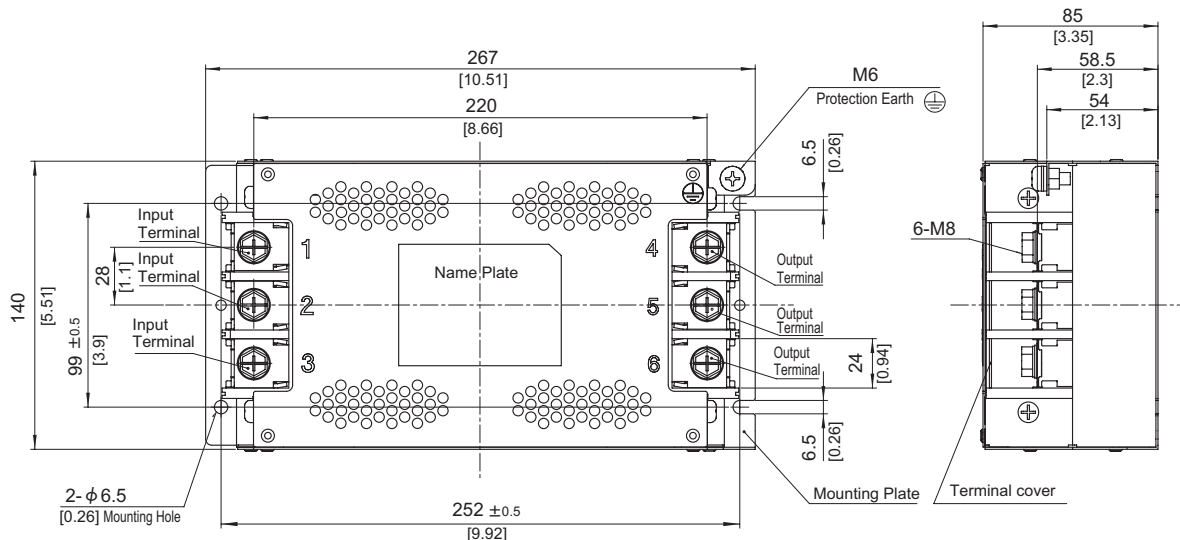


※ Can not be mounted upside-down.  
(mounted the top surface)

※ Tolerance : ±1 [±0.04]  
 ※ Weight : 3.8kg max  
 ※ Chassis Material : Stainless steel t=1.0 [0.04]  
 ※ Dimensions in mm, [ ]=inches  
 ※ Terminal block screw tightening torque M8:9.2N · m (93.9kgf · cm) max  
 ※ Protection Earth screw tightening torque M6:5.8N · m (59.2kgf · cm) max

## External view

TAC-150-□□□  
TAH-150-□□□

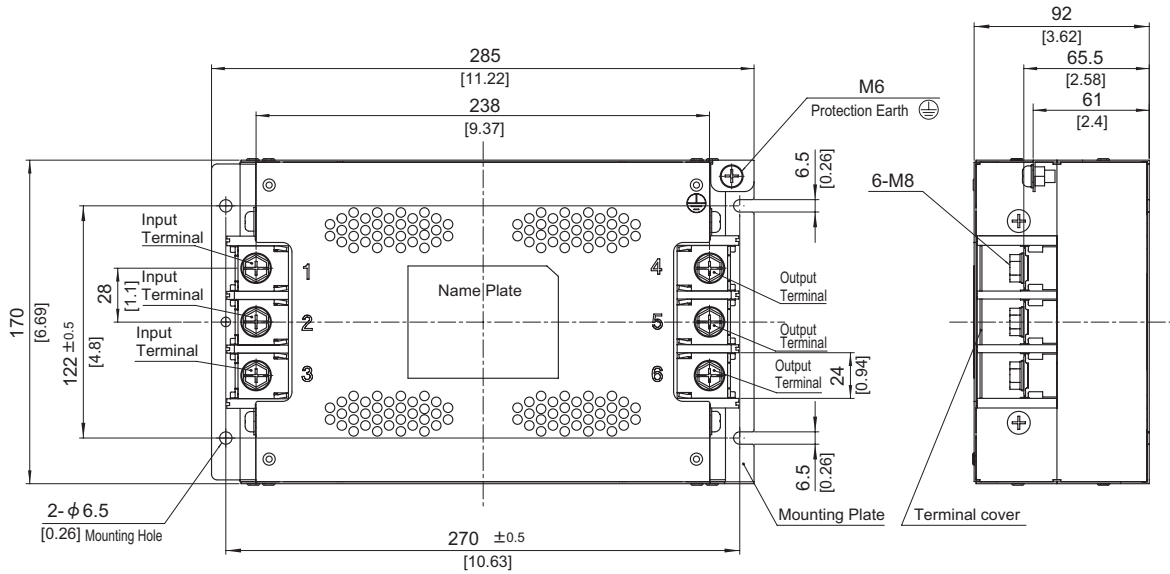

※ Can not be mounted upside-down.  
(mounted the top surface)

- ※ Tolerance :  $\pm 1$  [ $\pm 0.04$ ]
- ※ Weight : 4.8kg max
- ※ Chassis Material : Stainless steel t=1.0 [0.04]
- ※ Dimensions in mm, [ ]=inches
- ※ Terminal block screw tightening torque M8:9.2N · m (93.9kgf · cm) max
- ※ Protection Earth screw tightening torque M6:5.8N · m (59.2kgf · cm) max